




# 36-600

36 INCH (914 mm)

## Horizontal Earth Boring Machine

Photo may show optional equipment

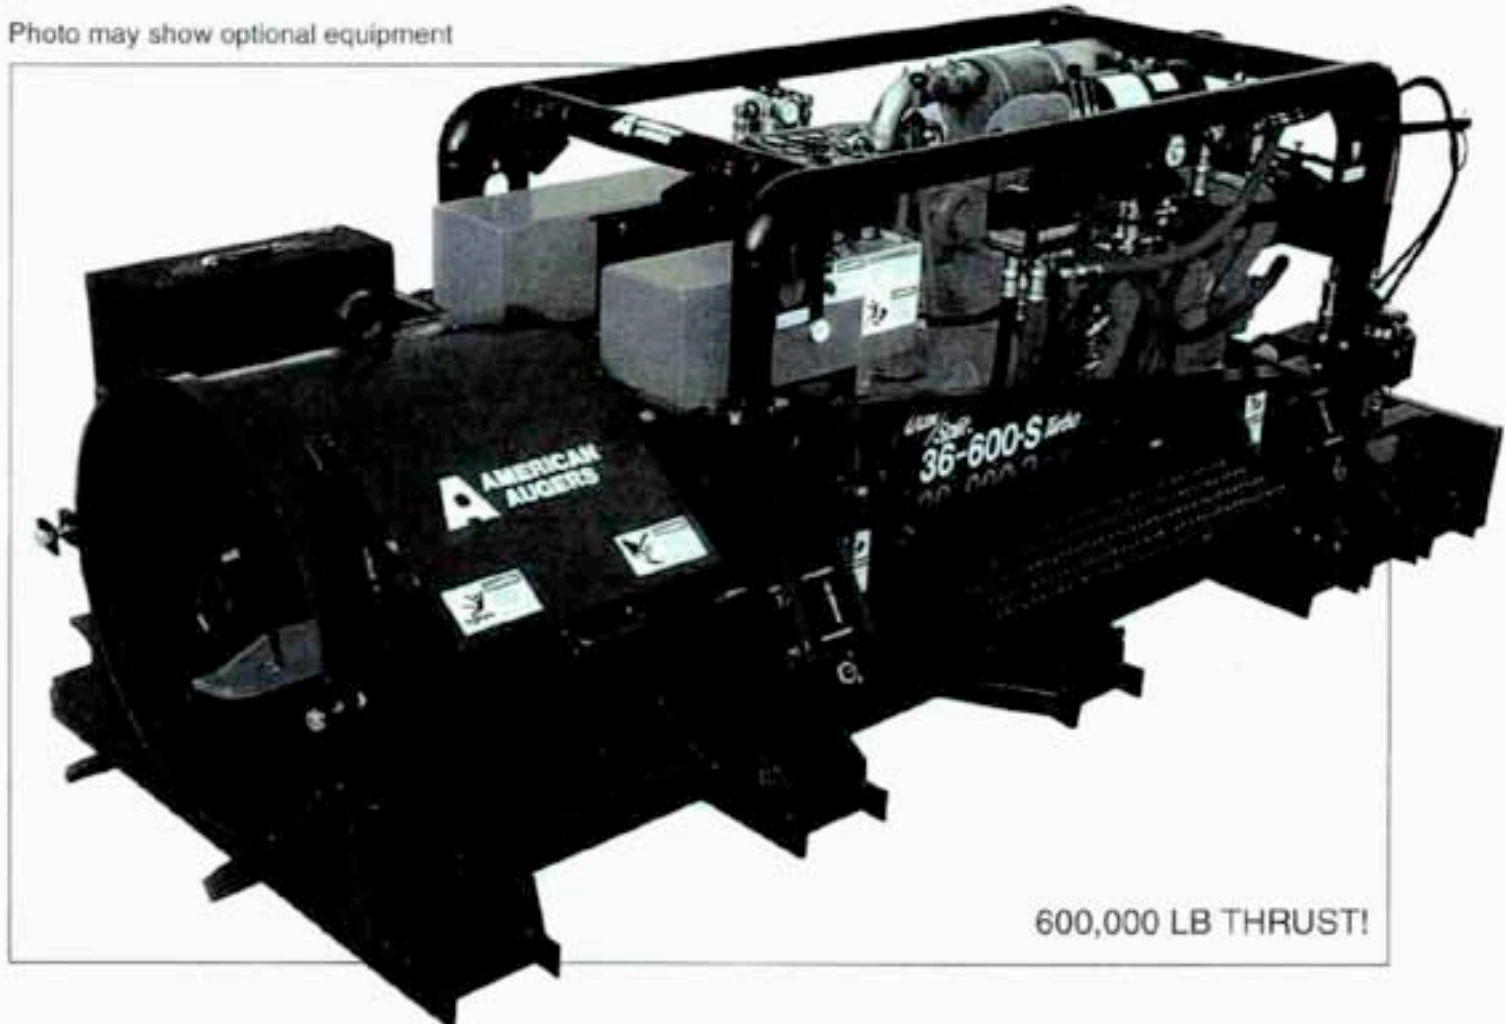

### The performance you expect from American Augers!

For rugged power in a compact package and a broad boring capacity from 12 to 36 inch casing diameter, contractors choose the American Augers 36-600. The proven four cylinder Deutz turbocharged diesel engine is coupled to a five speed transmission and planetary gear box. The radial piston hydraulic pump supplies 38 GPM at 6,000 PSI to two hydraulic cylinders to develop 600,000 pounds of forward thrust. The secondary hydraulic pump supplies

the push bar lock and winch, and provides for faster cylinder retraction.

American Augers' unitized box frame construction provides lasting alignment of the power train. In over 25 years of boring machine production, we have never had a frame fail. The low center line and wide stance create a low machine profile. True Quik-Split design permits the machine to separate into three sections for faster, easier lifts into and out of the pit.

Machine controls are clustered for easy operation. The 36-600 has an electric starter and an emergency switch for total machine shutdown. Warning lights monitor engine oil pressure and the alternator. The tachometer, fuel and hydraulic system gauges are in direct view. The clutch and shift levers are easily handled without strain. A spring loaded spoil chamber door deflects thrown debris. Vivid graphics guide safe and proper operation.